



Solid fuel products  
**SERIES LTC300**





Series LTC341  
Series LTC361

Series LTC381




LVD 2014/35/EU  
EMC 2014/30/EU  
RoHS3 2015/863/EU  
PED 2014/68/EU, article 4.3

ErP 2009/125/EU  
ErP 2015

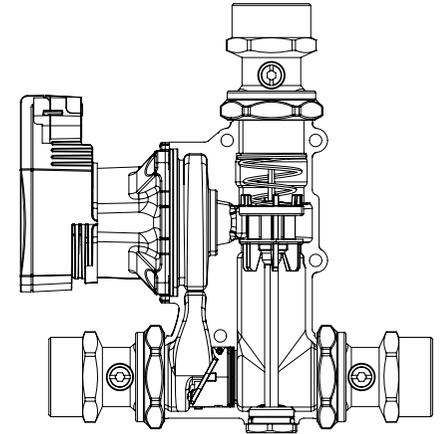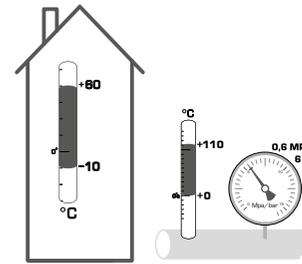


Mtrl.nr. 9814 1077 • Ritn.nr. 4843 vers. B • Rev. 2022-06-01


**1**

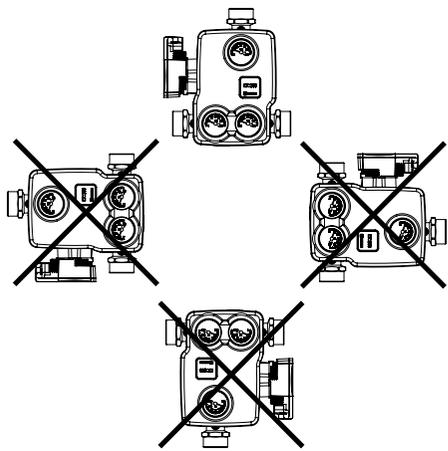


**2**

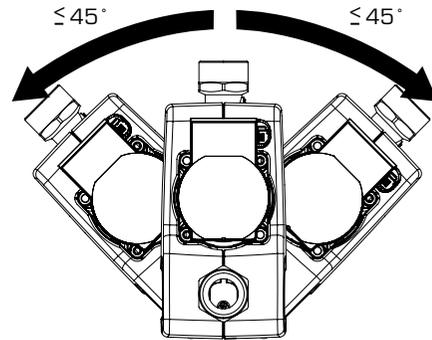

**3**



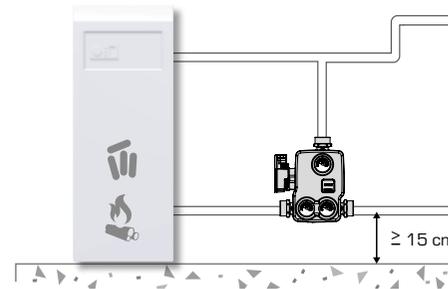


**230 VAC, 50Hz**

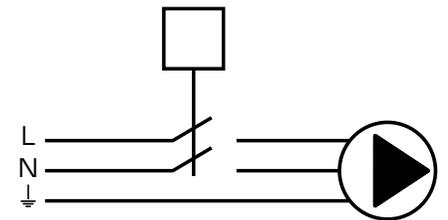


**a** 



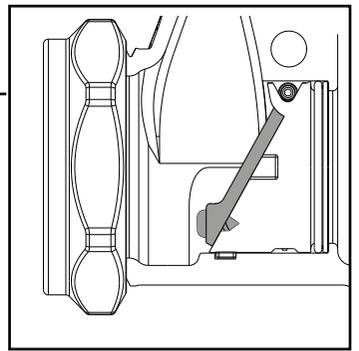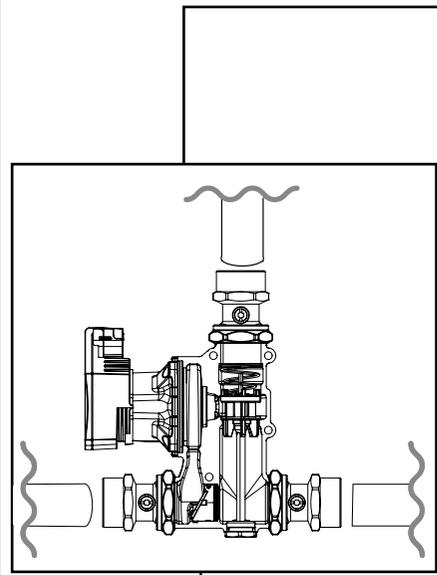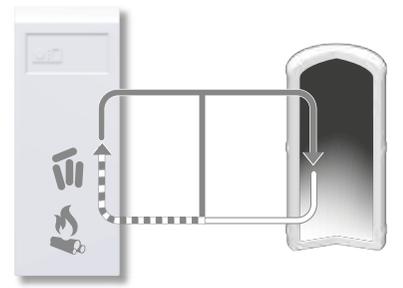





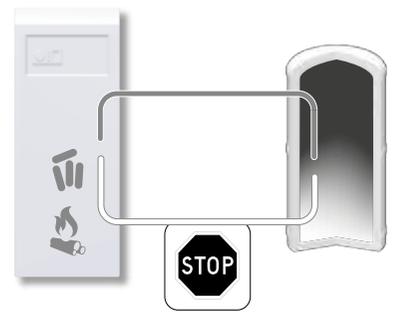



**b** 





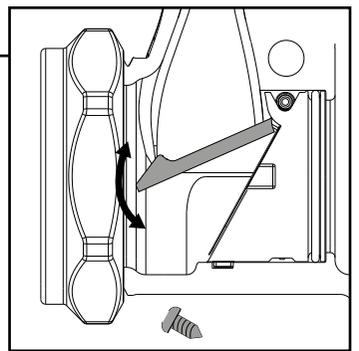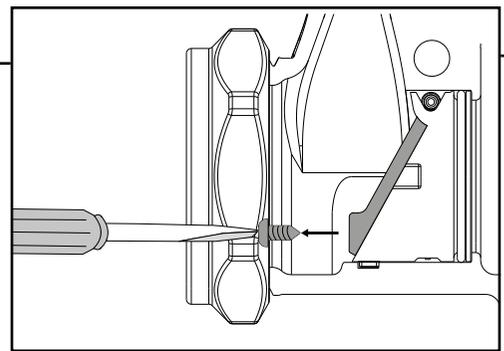



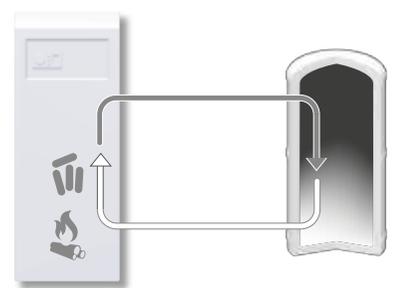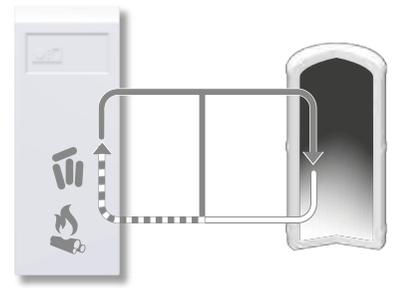


# 5

## Pump Settings

Click	LED display	Control mode	Pump curve
			Recommended
1		Constant speed	
2		Constant speed	
3		Variable differential pressure $\Delta p-v$	
4		Variable differential pressure $\Delta p-v$	
5		Variable differential pressure $\Delta p-v$	
6		Constant differential pressure $\Delta p-v$	
7		Constant differential pressure $\Delta p-v$	
8		Constant differential pressure $\Delta p-v$	
9		Constant speed	

# 6

## Display

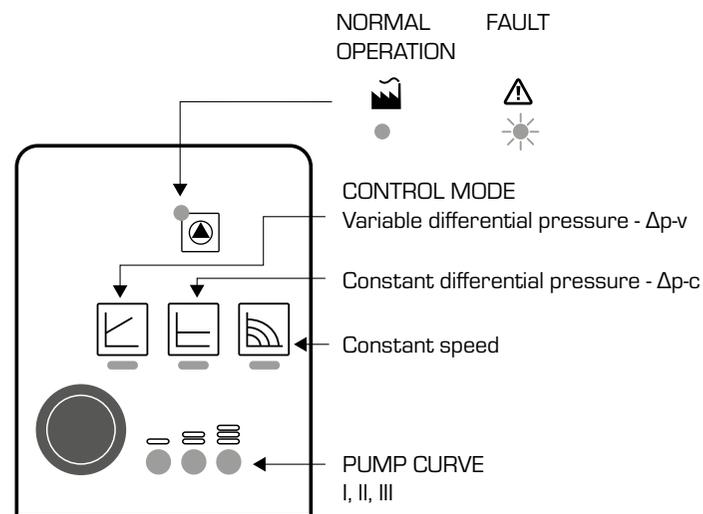


## Pump features



1	2	3	4
Hold	LED display	Last settings	Status
↓ 8 sec			Locked
↓ 8 sec			Unlocked
↓ 4 sec			Factory setting
↓ 3 sec			Venting




# Optimising load temperature

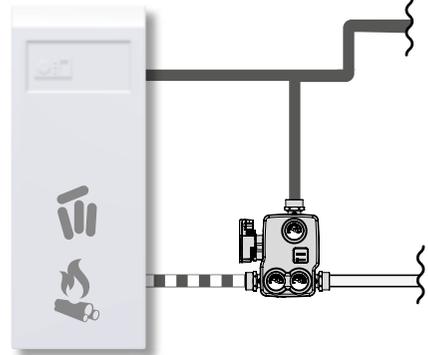


Temp °C

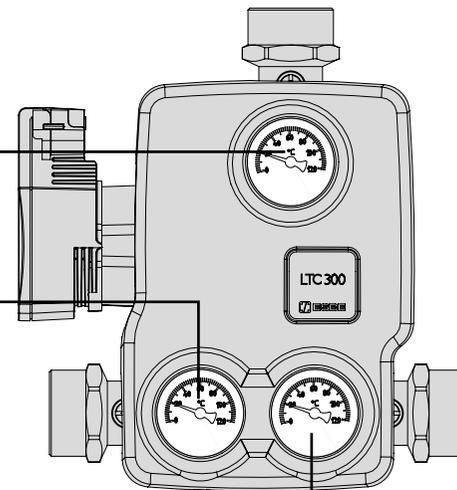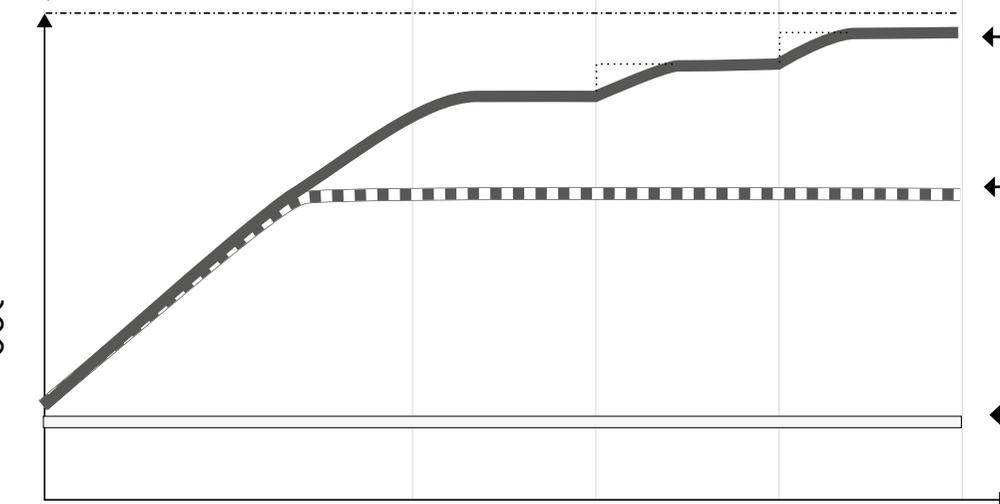

i

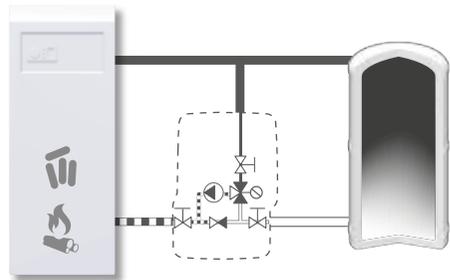

i

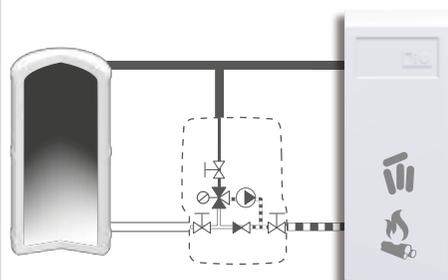

Piping Schematics are General Representations

i



<https://esbe.eu/group/products/solid-fuel-products/ltc300>

i



[www.esbe.eu](http://www.esbe.eu)