
WHC-03 HC RF Series

Heat&Cool heating floor controller Vision® Wireless

Technical Data Sheet





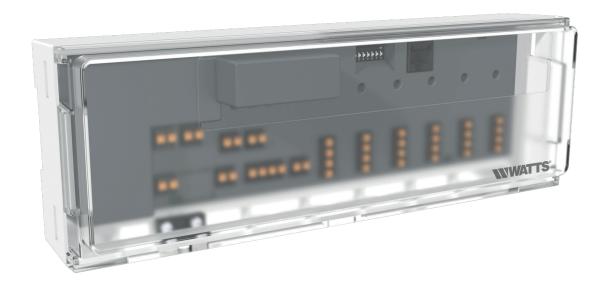


Description

Vision® Wireless enables temperature control of individual rooms in heating and/or cooling systems.

It is a wireless system that requires the use of a wireless room thermostat to control the temperature of individual rooms through remote contacts.

The Vision® system allows full remote control of the system using any browser from your PC or the dedicated smartphone app (iOS or Android) using the system's Wi-Fi connection.



SERIE VISION® WIRELESS WFC-03 HC RF

The WFC-03 Heating and Cooling Floor Controllers connect all components of the Vision® Wireless system and effectively control the motorized valves.

The DIN rail attachment and tool-less connectors provide quick and easy installation.

The LED diagnostic, combined with the USB data logger, facilitates verification and maintenance of the installation.

The inputs and outputs on the controller and on the Heat and Cool module allow to precisely control the heating and cooling system as well as the dehumidification management for optimal comfort.

Туре	Reference	Description
WFC-03 6Z HC RF 24	P08291	24V Floor Heating and Cooling RF Controller 6 zones
WFC-03 6Z HC RF 230	P08397	230V Floor Heating and Cooling RF Controller 6 zones
WFC-03 10Z HC RF 24	P08292	24V RF Floor Controller Heating and Cooling 10 Zones
WFC-03 10Z HC RF 230	P08399	230V Floor Heating and Cooling RF Controller 10 Zones
WFC-03 HCM RF 230	P08401	Heat and Cool Module for RF Heating and Cooling Floor Controller
TRF03 230/24	P08277	230V/24V transformer for RF heating and cooling floor controller


- Connectors without tools
- 24V transformer with socket (in option)
- Mounting on Din rail or directly on the wall
- Internal RF coil, optional external coil
- Configuration by DIP Swich
- LED diagnostic indication
- Data Logger on USB
- Remote control of the pump or boiler

- Anti-grip function
- Dehumidification control output on the heat&cool module or area offset on the controller
- Water probe inlet for automatic detection of hot or cold mode and for humidity control
- Up to 3 slave controllers
- Controller compatible with RF thermostats BT-D03 HC RF, BT-A03 HC RF and BT-DP03 HC RF

Technical characteristics		
Operating temperature	0 to 40°C	
Shipping and storage temperature	-10°C to +50°C	
IP protection rating	IP30	
Protection class	Class II	
Feeding	230 Vac 10% 50Hz - Transformer P08277 required for 24V	
Radio Frequency	868 MHz, <10mW, bi-directional communication	
Relay	2 x 5A	
Motorized valves	230V/24V depending on NC/NO versions up to 2W	
Standards	2014/35/EU, 2014/30/EU, 2014/53/EU, 2011/65/EU, 2012/19/EU, 2015/1188/EU	



Vision® Wireless System

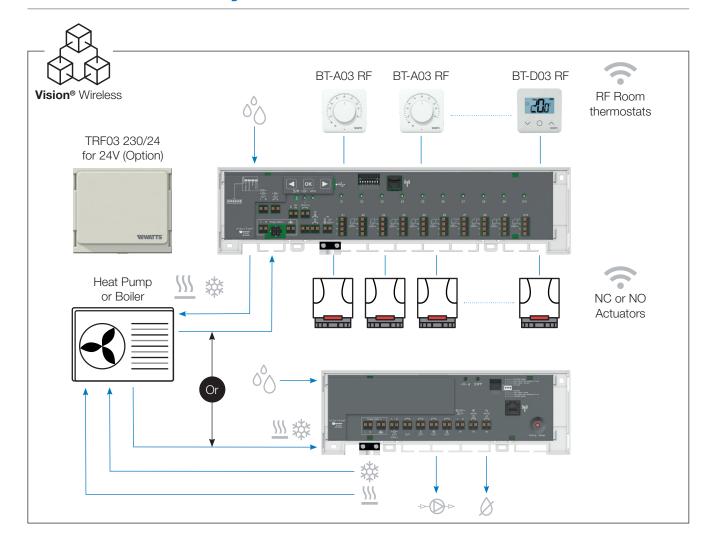

Specification text


Wireless heating and cooling floor controller. Allows 22CX motorized valve controller from Vision® Wireless series thermostats. Motorized valves are connected by means of connectors without tools.


A LED diagnostic system and a USB data logger allow the diagnosis of the installation.

Compliant with:

2014/35/EU - 2014/30/EU - 2014/53/EU - 2011/65/EU - 2012/19/EU - 2015/1188/EU.

Overall dimensions (mm)





The descriptions and photographs contained in this product specification sheet are supplied by way of information only and are not binding.

Watts Industries reserves the right to carry out any technical and design improvements to its products without prior notice.

Warranty: All sales and contracts for sale are expressly conditioned on the buyer's assent to Watts terms and conditions found on its website at www.wattswater.co.uk

Watts hereby objects to any term, different from or additional to Watts terms, contained in any buyer communication in any form, unless agreed to in a writing signed by an officer of Watts.



Watts Electronics S.A.S.

B.P. N°10 - Z.A. des Tourettes • 43800 ROSIERES • France
Tél. +33 (0)4 71 57 40 49 • Fax. +33 (0)4 71 57 40 90
Sales-rosieres@wattswater.com • www.wattswater.fr