


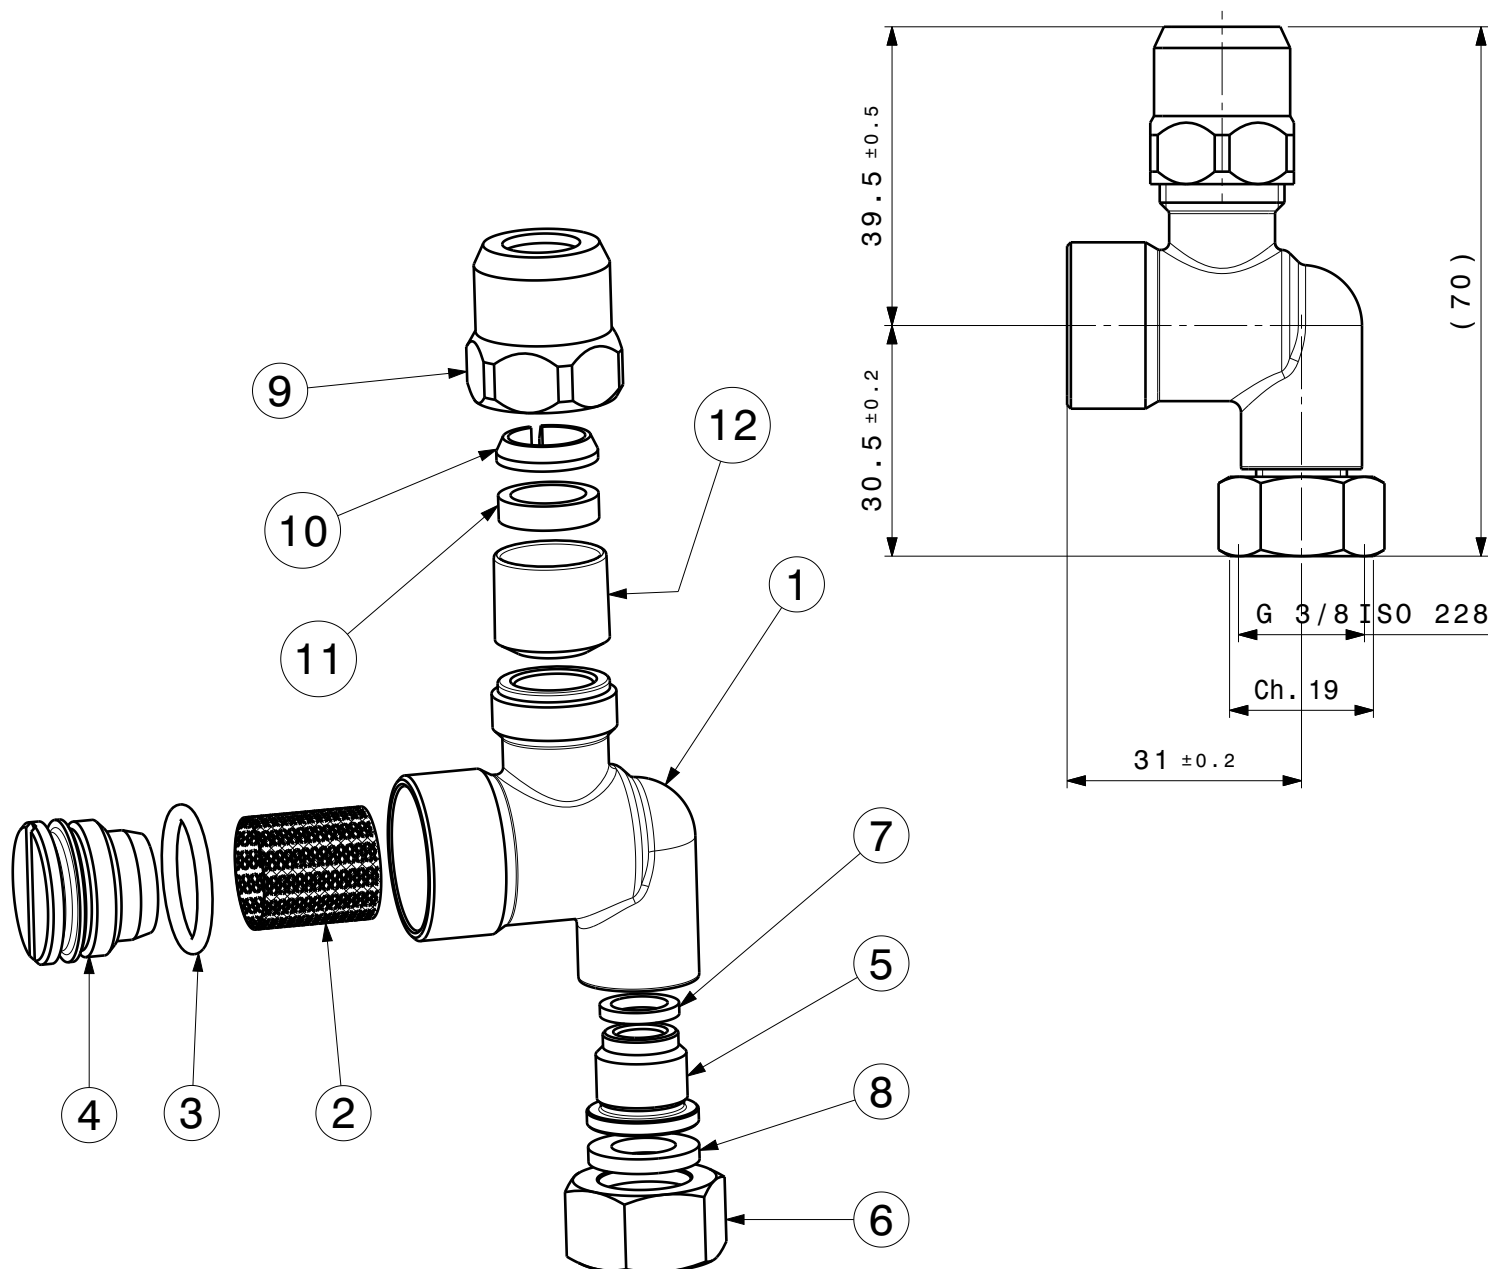

Working pressure range :	0.5 ÷ 10 bar
Flow rate :	-
Temperature range :	5 ÷ 65°C
Fluid :	Water

12	Washer	L11002	SL120.03	1	EMS GRILAMID L 20 H FWD natural	2	-
11	Washer	L2105	SL115.025	1	EPDM 70 Sh.	-	ASTM D 2000
10	Conical washer	L30101	SL116.02	1	CW617N	0	EN 12164
9	Nut	I04012	SL094.03	1	CW617N	4	EN 12164
8	Washer	L001	SL118.01	1	AFM 34/2	1	-
7	Washer	L002	SL119.02	1	Fibra cellulosa esente amianto	0	-
6	Hex nut	I00003	SL063.118	1	CW617N	3	EN 12164
5	Connection shank	E03003	SL063.068	1	CW617N	2	EN 12164
4	Filter cap	E00112	SL063.000	1	CW617N	7	EN 12164
3	O-Ring	L2201	SL112.17	1	EPDM 70 Sh.	0	ASTM D 2000
2	Steel filter	E0102	SL053.01	1	AISI 304	1	UNI EN 10088
1	Body	H112000	SL001.273	1	CW617N	1	EN 12165
Nr.	Description	Dis.	Code	Qt.	Material	Rev.	Norma

Drawn down: Name: R.C.
Date: 30 aprile 2024

Approved: Name: R.C.
Date: 30 aprile 2024

Description:
Adapter with filter M.F.3/8

Dis.Nr.
A8142

Rev.
0