

 ACCIAIO INOX AISI 316L STAINLESS STEEL AISI 316L EDELSTAHL AISI 316L		 15-108
 Germany	  **	
 France	 	
 Austria	 *	
 Norway	  *	
 Sweden		
 Netherlands		
 Switzerland		
 Denmark	  *	
 Russia		
 Italy	 	
 Czech Rep.	 * 	
 Australia	  *	
 Poland	   *	
 USA		

 ACCIAIO INOX GAS AISI 316L STAINLESS STEEL GAS AISI 316L EDELSTAHL GAS AISI 316L	
 Germany	
 Austria	 *
 ACCIAIO AL CARBONIO CARBON STEEL C-STAHl	
 Germany	 **
 France	 *
 Sweden	
 Czech Rep.	 * 
 Poland	  *
 Australia	 *

* Omologazione ottenuta direttamente dal distributore.


Approval obtained directly by our distributor.

Inhaber der Zulassung ist unser Vertreter.

** Gamma omologata **VdS** da Ø22 a Ø108 mm, valida esclusivamente per l'utilizzo abbinato di tubi e raccordi Eurotubi Europa.

VdS approved range from Ø22 to Ø108 mm, valid only for the combined use of Eurotubi Europa pipes and fittings.


VdS zugelassen von Ø22 - 108 mm, gilt ausschliesslich bei Verwendung von Eurotubi Fittings kombiniert mit Eurotubi Europa Rohren.



Flangia con bicchiere PN 10/16 e PN 6

Flange with pressing socket PN 10/16 and PN 6

Übergangsflansch PN 10/16 und PN 6

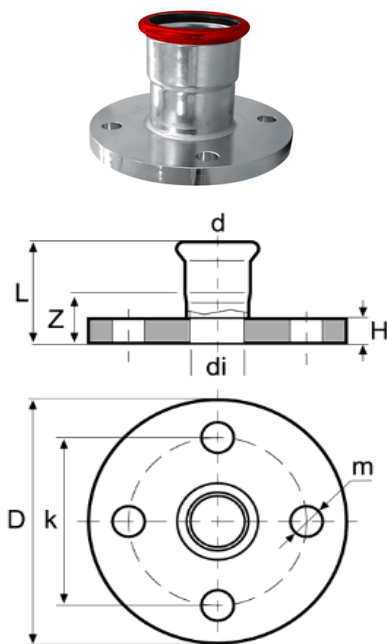


Code	d	D	di	L	H	m	k	Z			MOQ
PN 10/16											
C52AE-LBP	22	105	21	64	16	14	75	41	1.015	1	20
C52AF-LBP	28	115	27	67	16	14	85	43	1.218	1	20
C52AG-LBP	35	140	32	73	18	18	100	46	2.001	1	20
C52AH-LBP	42	150	39	81	18	18	110	49	2.299	1	20
C52AJ-LBP	54	165	54	96	18	18	125	59	2.762	1	20
C52AK	76,1	185	72	128	18	18	145	73	3.542	1	10
C52AL	88,9	200	85	146	20	18	160	83	4.337	1	10
C52AM	108	220	104	169	20	18	180	92	5.207	1	10
I diametri 88,9 e 108 hanno 8 fori Diameters 88,9 and 108 are with 8 holes Durchmesser 88,9 und 108 mit 8 Befestigungslöcher											
PN 6											
C53AE-LBP	22	90	21	60	14	11	65	37	665	1	20
C53AF-LBP	28	100	27	63	14	11	75	39	818	1	10
C53AG-LBP	35	120	32	69	16	14	90	42	1.321	1	10
C53AH-LBP	42	130	39	78	16	14	100	46	1.551	1	10
C53AJ-LBP	54	140	54	96	16	14	110	59	1.775	1	10
C53AK	76,1	160	72	126	16	14	130	71	2.396	1	5
C53AL	88,9	190	85	142	16	18	150	79	3.333	1	5
C53AM	108	210	104	165	16	18	170	88	4.045	1	5

Giunto a saldare (non galvanizzato)

Adaptor with plain and welding end (not galvanised)

Kombirohr mit Anschweissende (nicht verzinkt)

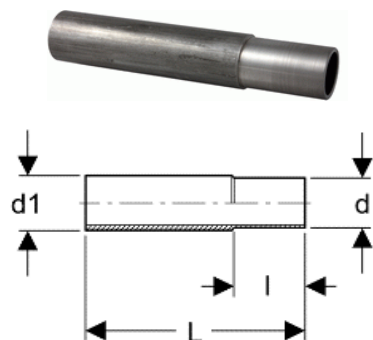


Code	d-d1	L	I			MOQ
C13AC	15-17,2	120	30	87	10	80
C13AD	18-21,3	120	30	126	10	80
C13AE	22-26,9	120	34	211	10	50
C13AF	28-33,7	120	34	305	10	40
C13AG	35-42,4	120	40	486	10	30
C13AH	42-48,3	120	45	461	8	24
C13AJ	54-60,3	120	50	606	4	24
C13AK	76,1-76,1	120	70	545	1	10
C13AL	88,9-88,9	120	75	692	1	10
C13AM	108-114,3	120	90	924	1	10

Scavalamento

Pipe bridge

Überbogen

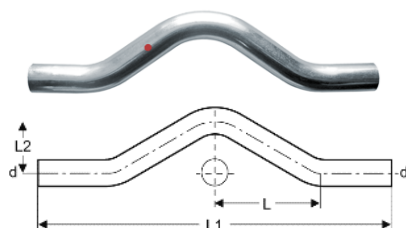

Code	d	L1	L2	L			MOQ
C76AB	12	200	35	55	86	15	30
C76AC	15	202	37	64	110	10	30
C76AD	18	237	42	66	148	10	30
C76AE	22	233	42	58	197	10	20
C76AF	28	301	50	102	312	10	20