
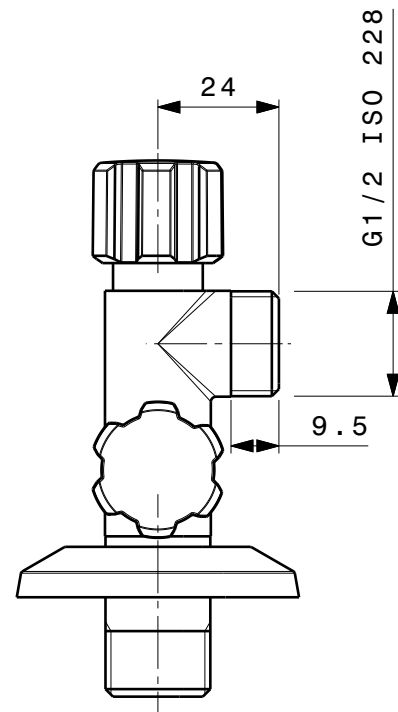
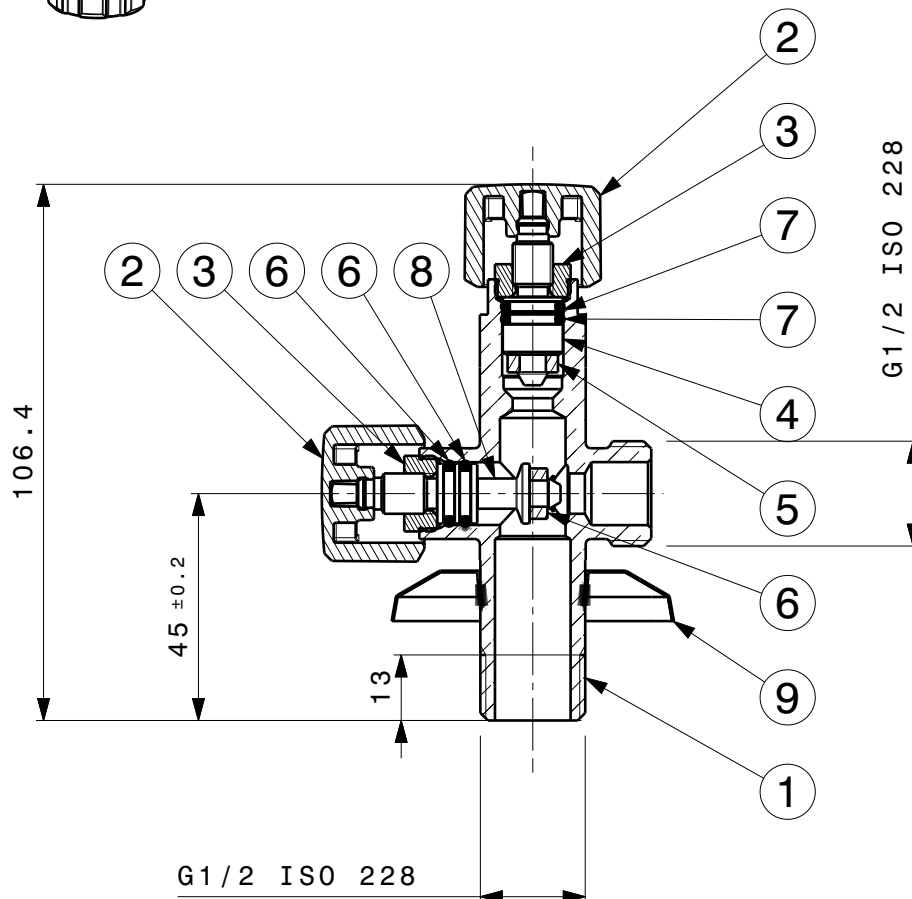
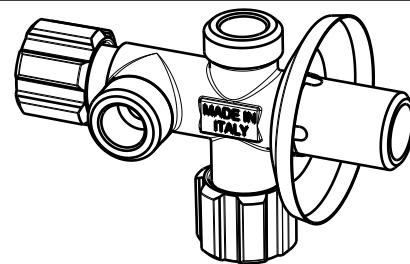


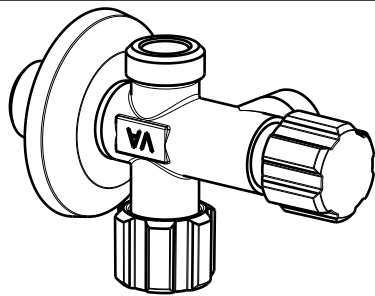

Vista
ausiliaria C

Working pressure range :	0.5 ÷ 10 bar
Flow rate :	30 l/m at 3 bar
Temperature range :	5 ÷ 65°C
Fluid :	Water

Working pressure range :	0.5 ÷ 10 bar
Flow rate :	20 l/m at 3 bar
Temperature range :	5 ÷ 65°C
Fluid :	Water

9	Cover plate	P7391	SL136.02	1	Acciaio AISI 430	0	-
8	Spindle	C20305	SL028.117	1	CW617N	4	EN 12164
7	O-Ring	L2201	SL112.23	2	EPDM 70 Sh.	0	ASTM D 2000
6	O-ring	L2201	SL112.37	2	EPDM 70 Sh.	0	ASTM D 2000
5	Seat washer	L2101	SL115.10	2	EPDM 80 Sh.	4	ASTM D 2000
4	Spindle	G210602	SL028.118	1	CW617N	5	EN 12164
3	Stop rod	C3005	SL028.200	2	CW617N	3	EN 12164
2	Handle	D2312	SL030.24	2	ABS	2	-
1	Body	A200125	SL001.176	1	CW617N	2	EN 12165
Nr.	Description	Dis.	Code	Qt.	Material	Rev.	Norma

Drawn down: Name: R.C.
Date: 27-07-17

Approved: Name: R.C.
Date: 27-07-17

Description:
Angle valve 1/2x1/2

Dis.Nr.
A7342

Rev.
0