



Technical Data/Technische Daten

S:FLEX Lift Trap sheet metal Rail 375


S:FLEX Lift Trapezblechschiene 375

description/Artikelbezeichnung:

S:FLEX Lift Trap sheet metal Rail 375/S:FLEX Lift Trapezblechschiene 375

art.-no./Artikelnummer:


720-200-612

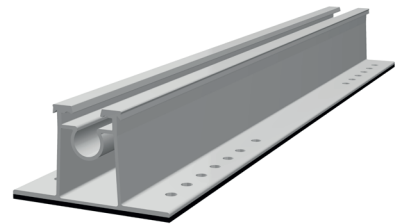

Product Data/Artikeldaten

material identification/Werkstoffbezeichnung:

EN AW-6063 T6
(EN AW-AMg0,7Si)




static values/ Statische Werte:

I_x	=	7,682 cm ⁴
I_y	=	8,967 cm ⁴
W_x	=	3,375 cm ³
W_y	=	2,491 cm ³
A	=	3,568 cm ²

general values/Allgemeine Werte:

width/Breite	=	72,0 mm
height/Höhe	=	42,0 mm
weight/Gewicht	=	0,369 kg
length/Länge	=	375,00 mm

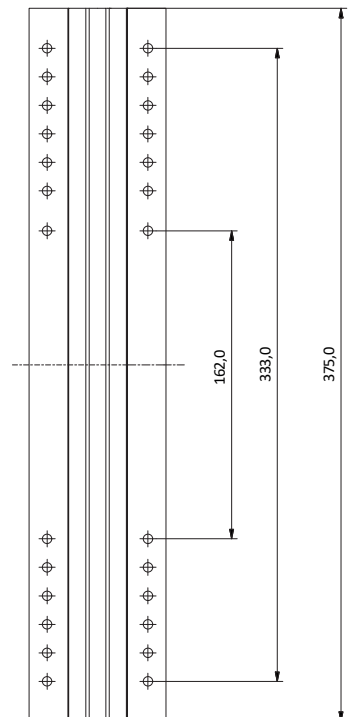

notices/Hinweise:

incl. 26x holes (d=5mm)/inkl. 26x Bohrung (d=5mm)

variable hole distance from 162mm to 333mm/variable Lochabstände von 162mm bis 333mm

incl. sealing strip Tape Tec moll 7202 (72mm wide)/inkl. Dichtstreifen Tape Tec moll 7202 (72mm breit)